



# Spotlights


**VIRIBRIGHT™** LED Spotlights are a direct replacement for 35W halogen bulbs and provides up to 85% energy savings over halogen. With long life, low energy consumption, no hazardous mercury, VIRIBRIGHT™ LED Spotlights are setting the benchmark for price and performance.

## Applications



- Track Lighting
- Accent Lighting
- Recessed Lighting



## 4.5W SPOTLIGHTS (GU10)




Color Temp. (K)	Base	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	GU10	73389	220 lm	110-120VAC	> 0.8	Yes	60°	> 25,000 h
		73380		220-240VAC				
		73410		110-120VAC				
		73401		220-240VAC				
4000 K	GU10	73390	250 lm	110-120VAC	> 0.8	Yes	60°	> 25,000 h
		73381		220-240VAC				
		73411		110-120VAC				
		73402		220-240VAC				
6000 K	GU10	73388	250 lm	110-120VAC	> 0.8	Yes	60°	> 25,000 h
		73379		220-240VAC				
		73409		110-120VAC				
		73400		220-240VAC				



## 4.5W SPOTLIGHTS (MR16)




Color Temp. (K)	Base	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan	Standard
2800 K	GU5.3	73508	220 lm	12V AC / DC	> 0.8	No	60°	> 25,000 h	UL
		73383							CE
		73511					UL		
		73404					CE		
4000 K	GU5.3	73507	250 lm	12V AC / DC	> 0.8	No	60°	> 25,000 h	UL
		73384							CE
		73510					UL		
		73405					CE		
6000 K	GU5.3	73509	250 lm	12V AC / DC	> 0.8	No	60°	> 25,000 h	UL
		73382							CE
		73512					UL		
		73403					CE		






## 4.5W SPOTLIGHTS (E26/E27/B22/E14)

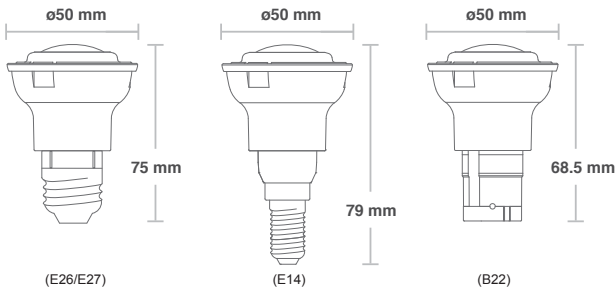

Color Temp. (K)	Base	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	E26	73386	220 lm	110-120VAC	> 0.8	Yes	60°	> 25,000 h
	E27	73371		220-240VAC				
	B22	73374		220-240VAC				
	E14	73377		220-240VAC				
4000 K	E26	73387	250 lm	110-120VAC	> 0.8	Yes	60°	> 25,000 h
	E27	73372		220-240VAC				
	B22	73375		220-240VAC				
	E14	73378		220-240VAC				
6000 K	E26	73385	250 lm	110-120VAC	> 0.8	Yes	60°	> 25,000 h
	E27	73370		220-240VAC				
	B22	73373		220-240VAC				
	E14	73376		220-240VAC				



Color Temp. (K)	Base	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	E26	73407	220 lm	110-120VAC	> 0.8	Yes	80°	> 25,000 h
	E27	73392		220-240VAC				
	B22	73395		220-240VAC				
	E14	73398		220-240VAC				
4000 K	E26	73408	250 lm	110-120VAC	> 0.8	Yes	80°	> 25,000 h
	E27	73393		220-240VAC				
	B22	73396		220-240VAC				
	E14	73399		220-240VAC				
6000 K	E26	73406	250 lm	110-120VAC	> 0.8	Yes	80°	> 25,000 h
	E27	73391		220-240VAC				
	B22	73394		220-240VAC				
	E14	73397		220-240VAC				

