



T8 Tubes


The unique design of **VIRIBRIGHT™** T8 LED Tubes is setting the benchmark for price and performance. It is offered in both safety switched and single side powered versions which are compatible to the majority of fixtures in the market.

Applications

- Commercial Lighting
- Residential Lighting
- Hospitality Lighting




LED T8 TUBE - Safety Switched

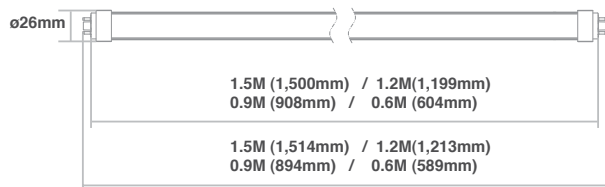

ULTRA BRIGHT

Color Temp. (K)	Length	Wattage	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	0.6M (2')	10W	73322	750 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73325	1100 lm					
	1.2M (4')	20W	73328	1500 lm					
	1.5M (5')	25W	73331	1750 lm					
4000 K	0.6M (2')	10W	73323	900 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73326	1350 lm					
	1.2M (4')	20W	73329	1800 lm					
	1.5M (5')	25W	73332	2000 lm					
6000 K	0.6M (2')	10W	73324	1000 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73327	1500 lm					
	1.2M (4')	20W	73330	2000 lm					
	1.5M (5')	25W	73333	2200 lm					
2800 K	0.6M (2')	10W	73334	750 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73337	1100 lm					
	1.2M (4')	20W	73340	1500 lm					
	1.5M (5')	25W	73343	1750 lm					
4000 K	0.6M (2')	10W	73335	900 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73338	1350 lm					
	1.2M (4')	20W	73341	1800 lm					
	1.5M (5')	25W	73344	2000 lm					
6000 K	0.6M (2')	10W	73336	1000 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73339	1500 lm					
	1.2M (4')	20W	73342	2000 lm					
	1.5M (5')	25W	73345	2200 lm					

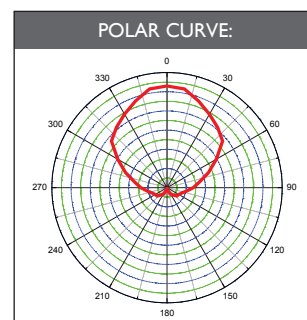


STANDARD

Color Temp. (K)	Length	Wattage	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	0.6M (2')	10W	73105	600 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73119	900 lm					
	1.2M (4')	20W	73073	1200 lm					
	1.5M (5')	25W	73130	1450 lm					
4000 K	0.6M (2')	10W	73115	700 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73117	1000 lm					
	1.2M (4')	20W	73108	1400 lm					
	1.5M (5')	25W	73128	1700 lm					
6000 K	0.6M (2')	10W	73104	700 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73118	1000 lm					
	1.2M (4')	20W	73072	1400 lm					
	1.5M (5')	25W	73129	1750 lm					
2800 K	0.6M (2')	10W	73437	600 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73440	900 lm					
	1.2M (4')	20W	73443	1200 lm					
	1.5M (5')	25W	73446	1450 lm					
4000 K	0.6M (2')	10W	73438	700 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73441	1000 lm					
	1.2M (4')	20W	73444	1400 lm					
	1.5M (5')	25W	73447	1700 lm					
6000 K	0.6M (2')	10W	73436	700 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73439	1000 lm					
	1.2M (4')	20W	73442	1400 lm					
	1.5M (5')	25W	73445	1750 lm					






LED T8 TUBE - Single Side Powered

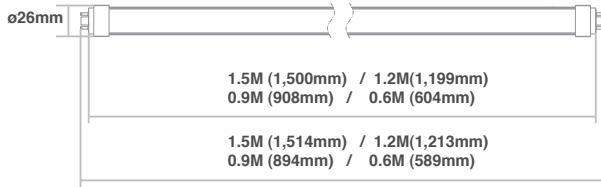

ULTRA BRIGHT

Color Temp. (K)	Length	Wattage	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	0.6M (2')	10W	73346	750 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73349	1100 lm					
	1.2M (4')	20W	73352	1500 lm					
	1.5M (5')	25W	73355	1750 lm					
4000 K	0.6M (2')	10W	73347	900 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73350	1350 lm					
	1.2M (4')	20W	73353	1800 lm					
	1.5M (5')	25W	73356	2000 lm					
6000 K	0.6M (2')	10W	73348	1000 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73351	1500 lm					
	1.2M (4')	20W	73354	2000 lm					
	1.5M (5')	25W	73357	2200 lm					
2800 K	0.6M (2')	10W	73358	750 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73361	1100 lm					
	1.2M (4')	20W	73364	1500 lm					
	1.5M (5')	25W	73367	1750 lm					
4000 K	0.6M (2')	10W	73359	900 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73362	1350 lm					
	1.2M (4')	20W	73365	1800 lm					
	1.5M (5')	25W	73368	2000 lm					
6000 K	0.6M (2')	10W	73360	1000 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73363	1500 lm					
	1.2M (4')	20W	73366	2000 lm					
	1.5M (5')	25W	73369	2200 lm					

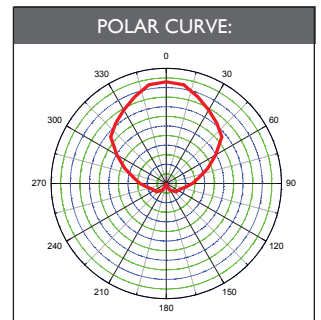

STANDARD

Color Temp. (K)	Length	Wattage	Item No.	Lumen (Lm)	Voltage	Power Factor	Dimming	Beam Angle (°)	Lifespan
2800 K	0.6M (2')	10W	73253	600 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73256	900 lm					
	1.2M (4')	20W	73259	1200 lm					
	1.5M (5')	25W	73262	1450 lm					
4000 K	0.6M (2')	10W	73254	700 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73257	1000 lm					
	1.2M (4')	20W	73260	1400 lm					
	1.5M (5')	25W	73263	1700 lm					
6000 K	0.6M (2')	10W	73252	700 lm	220-240VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73255	1000 lm					
	1.2M (4')	20W	73258	1400 lm					
	1.5M (5')	25W	73261	1750 lm					
2800 K	0.6M (2')	10W	73461	600 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73464	900 lm					
	1.2M (4')	20W	73467	1200 lm					
	1.5M (5')	25W	73470	1450 lm					
4000 K	0.6M (2')	10W	73462	700 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73465	1000 lm					
	1.2M (4')	20W	73468	1400 lm					
	1.5M (5')	25W	73471	1700 lm					
6000 K	0.6M (2')	10W	73460	700 lm	85-285VAC	> 0.8	No	140°	> 25,000 h
	0.9M (3')	15W	73463	1000 lm					
	1.2M (4')	20W	73466	1400 lm					
	1.5M (5')	25W	73469	1750 lm					

